

600-D





SPECIFICATIONS:

- **Voltage Input :** 12 VDC / 24 VDC (per Magnet)
- **Current Draw :** 12V / 480mA ; 24V / 240mA ($\pm 5\%$)
- **Holding Force :** Up to 600 lbs x2 (272 kg x2)
- **Anti-Rust Surface Treatment :** Blue Zinc Plating
- **Operating Temperature :** 0~55° C (32~131° F)
- **Operating Humidity :** 0~95% (non condensing)
- **Weight (Magnet) :** 2.2 kg ($\pm 1\%$)
- **Dimensions :** Magnet - (L)500x(W)42x(T)25 mm
Armature - (L)180x(W)38x(T)11 mm




FEATURES:

- Ideal for Double Swing Doors
- Dual Voltage Selectable (12 VDC or 24 VDC)
- Low Current Consumption
- Reliable Holding Force
- Durable and Silence Operation
- Cosmeticize Anodized Aluminum Casing
- Surge & Spike Protection PCB
- Anti-Tamper Jam Nuts
- Full Range of Optional Brackets
- Anti Residual Magnetism Kick Off Button

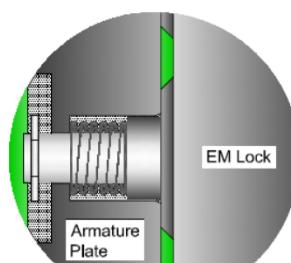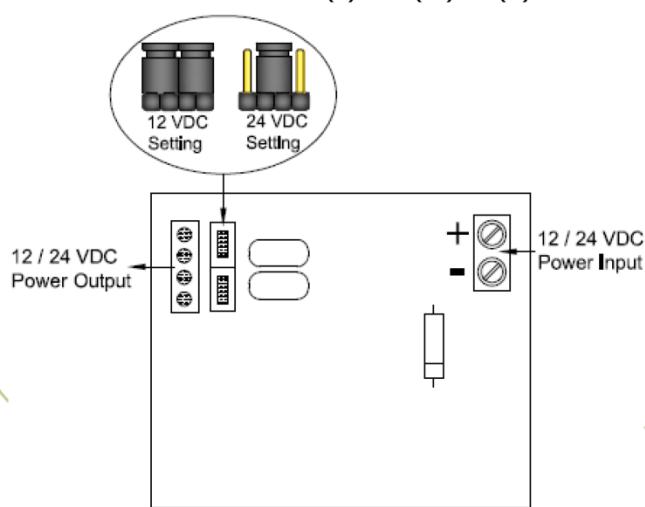

EM Lock Energized

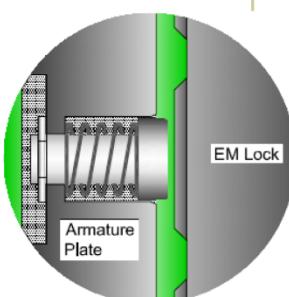

EM Lock De-energized

IMPORTANT!

Set the jumper position according to the power input correctly before switch ON the power.