


Waterproof No Touch Button

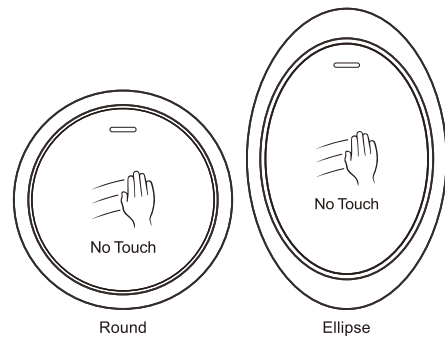

Round

Ellipse

User Manual

Main Features

- > IP66 waterproof
- > Zinc-alloy housing
- > Output contact: NO/NC/COM
- > Sensor distance: 3~10cm (Adjustable)
- > Red LED indicator: standby
- > Green LED indicator: active
- > 5s, 10s or Toggle Mode Timer Delay (Optional)

Specifications


| | |
|--------------------------|---|
| Operating Voltage | 10~24V DC |
| Idle Current | ≤15mA |
| Working Current | ≤25mA |
| Sensor Distance | 3~10cm (Adjustable) |
| Output | NC or NO |
| Infrared Wavelength | 940 nm |
| Timer Delay (Optional) | 5s / 10s / Toggle Mode |
| Environment | IP66 Waterproof |
| Operating Temperature | -20 C~+60 C |
| Operating Humidity | 0%~86% |
| Physical | Zinc-alloy |
| Dimension | Diameter: 73mm, Thickness: 20mm (Round) L105 x W69 x H20 mm(Ellipse) |
| Unit Weight | 150g(Round) 200g(Ellipse) |
| Shipping Weight | 210g(Round) 260g(Ellipse) |

- 01 -

Wiring

| Wire Color | Function | Notes |
|------------|----------|-----------------|
| Red | Power + | 10~24 Volts DC |
| Black | GND | Ground |
| Green | NC | Normally Closed |
| Brown | COM | Common |
| White | NO | Normally Open |

Sensor Distance and Timer Delay (Optional) Adjustment

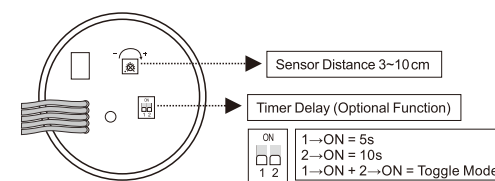

- 02 -

Packing List

| Item | Quantity |
|--------------------|----------|
| Gift Box | 1 |
| No Touch Button | 1 |
| Manual | 1 |
| Self Tapping Screw | 2 |
| Wall Fixing Plug | 2 |