



DOOR ENTRY ONLINE

SPECIALISTS IN ACCESS CONTROL SOLUTIONS

Resetable Call Point

Model: ABK-808G

DPDT Resetable Call Point;
2NO/2NC/2COM;
3A/DC 36V(max);
ABS Material.



► Features:

- DPDT Resetable Call Point;
- 2NO/2NC/2COM;
- 3A/DC 36V(max);
- ABS Material.




View	Front	Side	Back
Photos			

► Product Parameter




Model	808G
Output Contact	2NO/2NC/2COM
Power Supply	DC36V, 3A
Size(mm)	97L*92W*59H
Material	ABS
Weight(KG)	0.185

Panel logo	Customizable
Mechanical Life	500,000 Tested aging test qualified
Operating Temp	-20°C~+55°C(-4-131F)
Operating humidity	0-95% (RH)
Package Quantity	1 PCS/box


► Dimensions

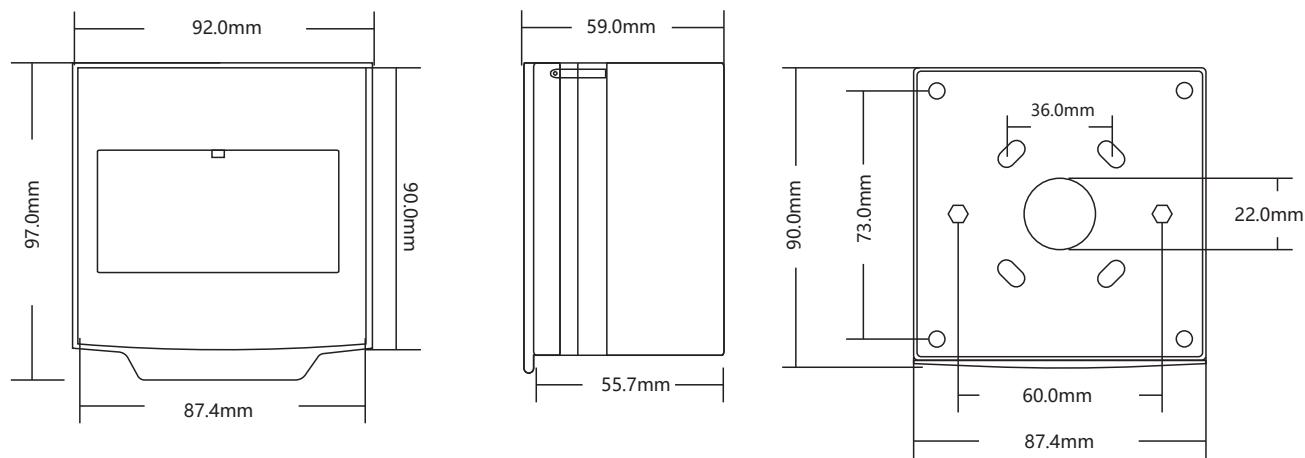

Model	ABK 808G
Pattern	English
Photos	

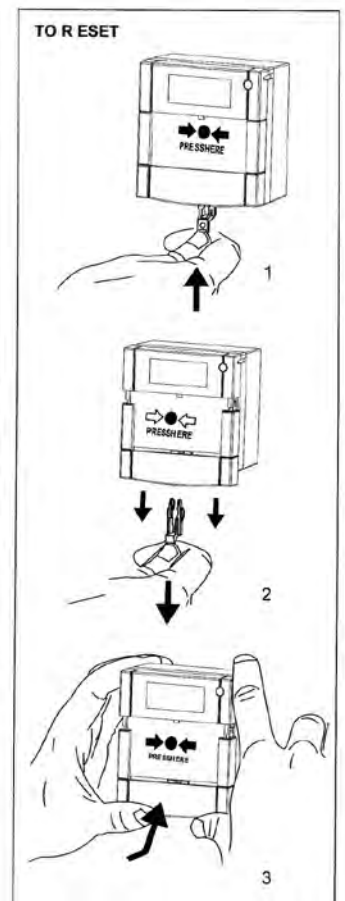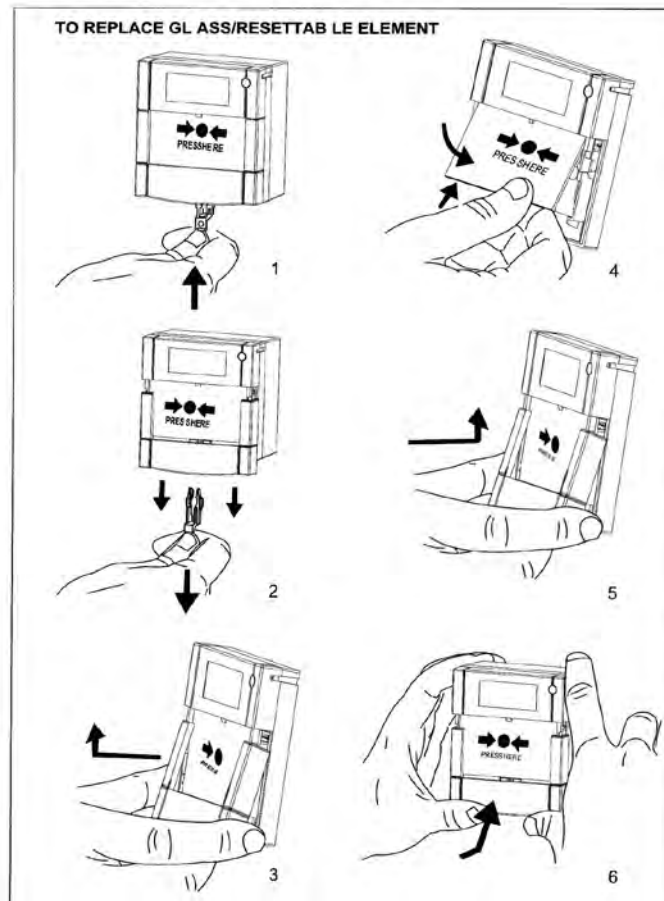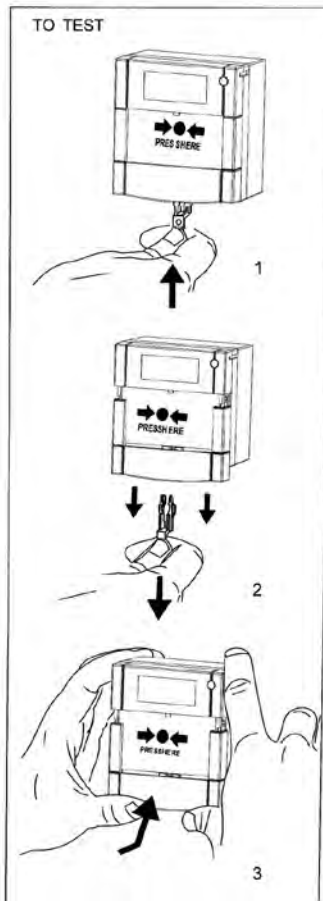


INSTALLATION INSTRUCTIONS FOR THE MANUAL CALL POINT MODELS BOPO-FW-1....,BOPO-FW-2....,BOPO-FW-470R....,BOPO-FW-470RL....

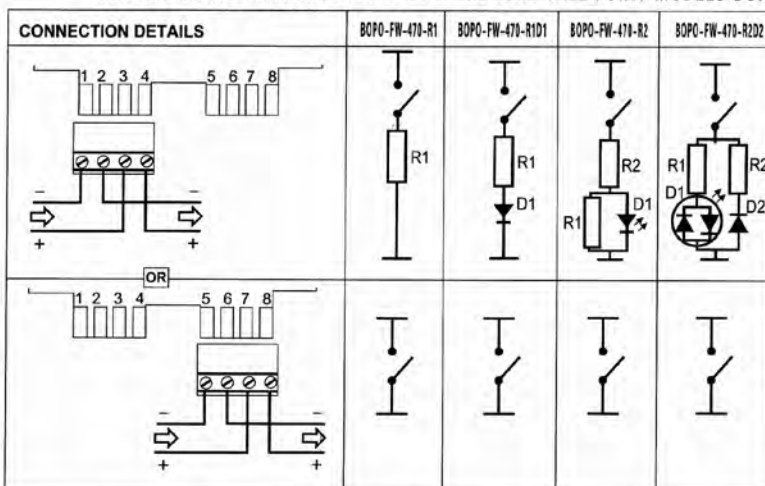

X in the BOPO-FW code (left) represents the final digits of the part number, which indicate BOPO-FW colour, component values, mounting options and element type.



eg BOPO-FW R470SF
(BOPO-FW, Red, 470R, Surface, Flexible Element).

DIMENSIONS

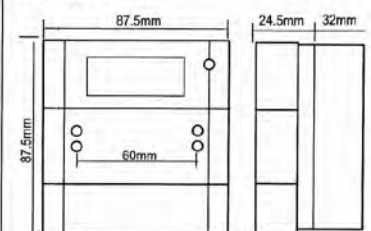

PUSH FIT CONNECTOR

After wiring the terminal connector, plug into the appropriate position, see connection details (left).

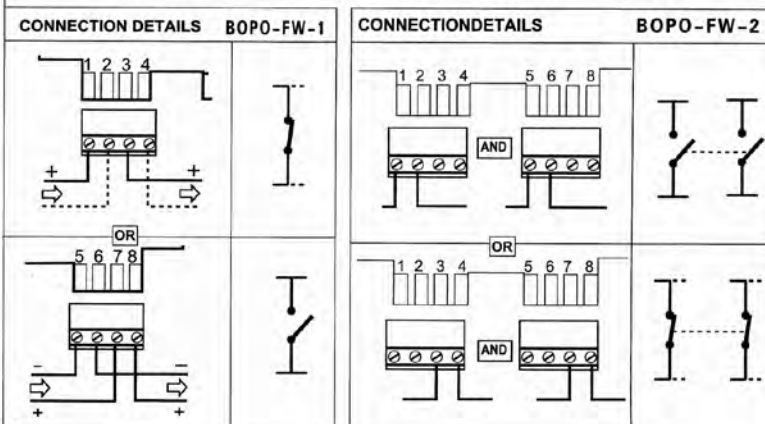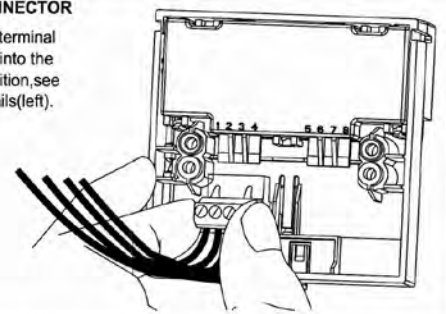

TECHNICAL DATA

- 30VDC Max
- 2A Max
- IP24D
- 110/160g

- 30 °C to 70 °C
- Red, Ral 3001
- Yellow, Ral 1006
- Green, Ral 6016
- White, Ral 90010
- Blue, Ral 5002