



600-S



SPECIFICATIONS:

- **Voltage Input :** 12 VDC / 24 VDC
- **Current Draw :** 12V / 480mA ; 24V / 240mA (±5%)
- **Holding Force :** Up to 600 lbs (272 kg)
- **Anti-Rust Surface Treatment :** Blue Zinc Plating
- **Operating Temperature :** 0~55° C (32~131° F)
- **Operating Humidity :** 0~95% (non condensing)
- **Weight (Magnet) :** 1.08 kg (±1%)
- **Dimensions :** Magnet - (L)250x(W)42x(T)25 mm
Armature - (L)180x(W)38x(T)11 mm

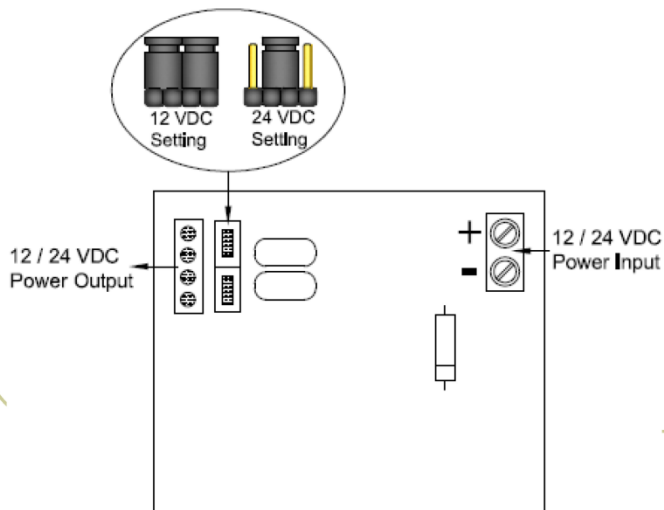


IMPORTANT!

Set the jumper position according to the power input correctly before switch ON the power.




FEATURES:

- **Dual Voltage Selectable (12 VDC or 24 VDC)**
- **Low Current Consumption**
- **Reliable Holding Force**
- **Durable and Silence Operation**
- **Cosmeticize Anodized Aluminum Casing**
- **Surge & Spike Protection PCB**
- **Anti-Tamper Jam Nuts**
- **Full Range of Optional Brackets**
- **Anti Residual Magnetism Kick Off Button**



EM Lock Energized



EM Lock De-energized